








**MODEL #**  
C803A

**FREQUENCY RESPONSE**  
70Hz-15.5kHz

**SENSITIVITY**  
95dB (1W/1M)

**Installation must comply with all Building Codes and NFPA guidelines. Installation must adhere to N.E.C. and NFPA 70/72 wiring directives and comply with all National and Local Building Codes.**

**TRANSFORMER COLOR CODE DIAGRAMS**

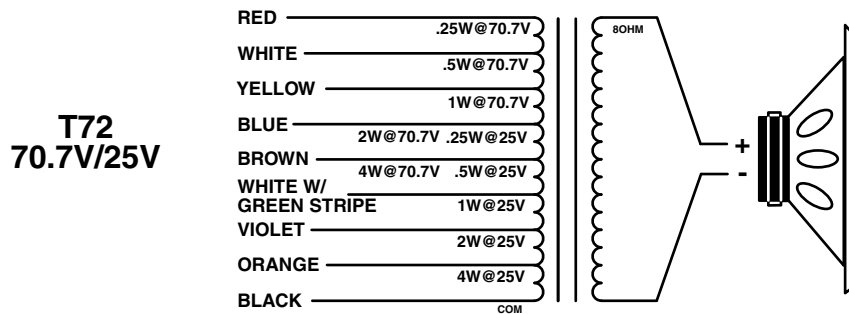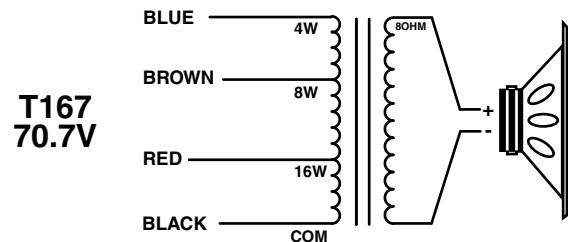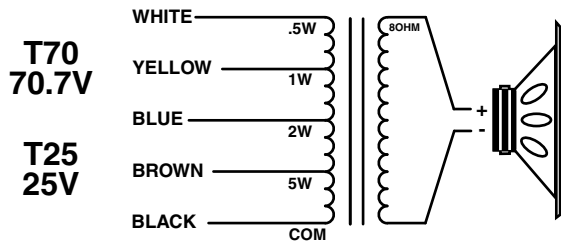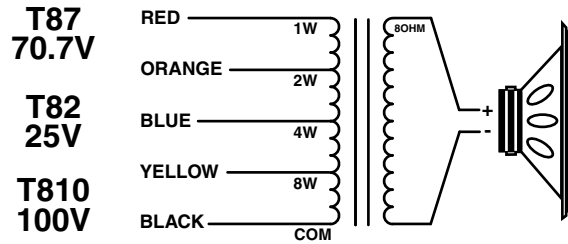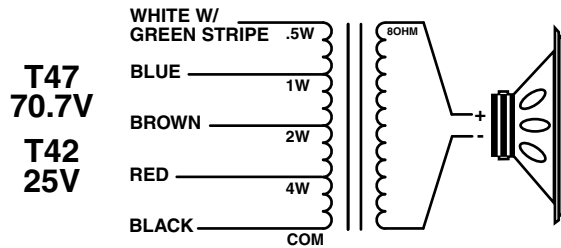

**Speaker must be installed with UL Listed Baffles: 51-8, 62-8. Speaker must be installed with UL Listed Enclosures: 95-8, 95-8-7, 95-8-10, 96-8, 96-8-7, 96-8-10, CS95-8, Q408**



**Atlas  
Sound**

*Specifications are subject to change without notice*

**AtlasSound.com**