
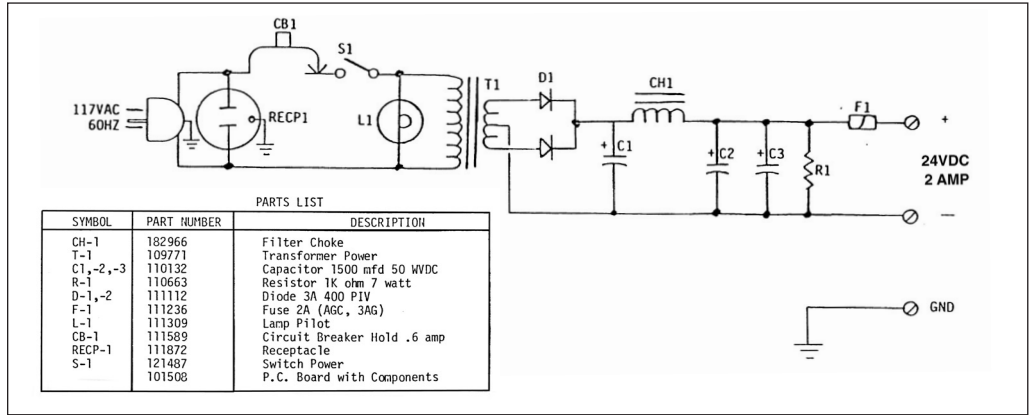


**Model TS242 Power Supply.** UL Listed unit is used in a variety of applications that do not require a regulated supply. Model includes a 117 VAC unswitched outlet, neon pilot lamp, barrier-type terminals, 6" power cord, and per-

forated grille for ventilation. The power is rated at 24VDC ar 2 amps between the positive (+) and negative (-) terminals. A chassis ground terminal is available if required.

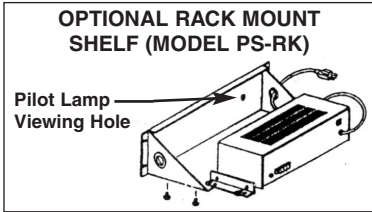

Specifications are subject to change without notice

[www.AtlasSound.com](http://www.AtlasSound.com)

1601 JACK MCKAY BOULEVARD ENNIS, TEXAS U.S.A. • TELEPHONE: (800) 876-3332 • FAX: (800) 765-3435

©2001 ATLAS SOUND LP

Printed in U.S.A.



00801

ATS000716 RevC 8/01

PN 116025

**Model TS242 Power Supply.** UL Listed unit is used in a variety of applications that do not require a regulated supply. Model includes a 117 VAC unswitched outlet, neon pilot lamp, barrier-type terminals, 6" power cord, and per-

forated grille for ventilation. The power is rated at 24VDC ar 2 amps between the positive (+) and negative (-) terminals. A chassis ground terminal is available if required.

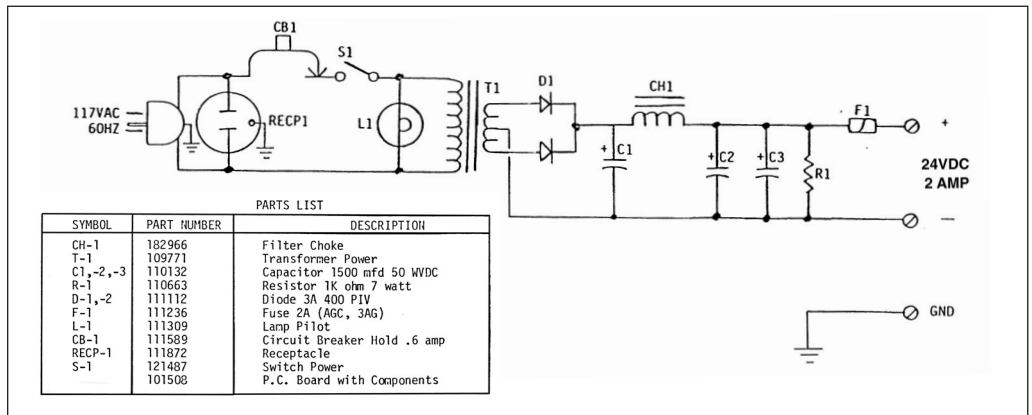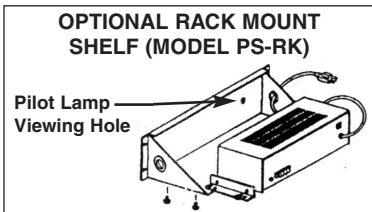

Specifications are subject to change without notice

[www.AtlasSound.com](http://www.AtlasSound.com)

1601 JACK MCKAY BOULEVARD ENNIS, TEXAS U.S.A. • TELEPHONE: (800) 876-3332 • FAX: (800) 765-3435

©2001 ATLAS SOUND LP

Printed in U.S.A.

00801

ATS000716 RevC 8/01

PN 116025